


TOL = ±.010

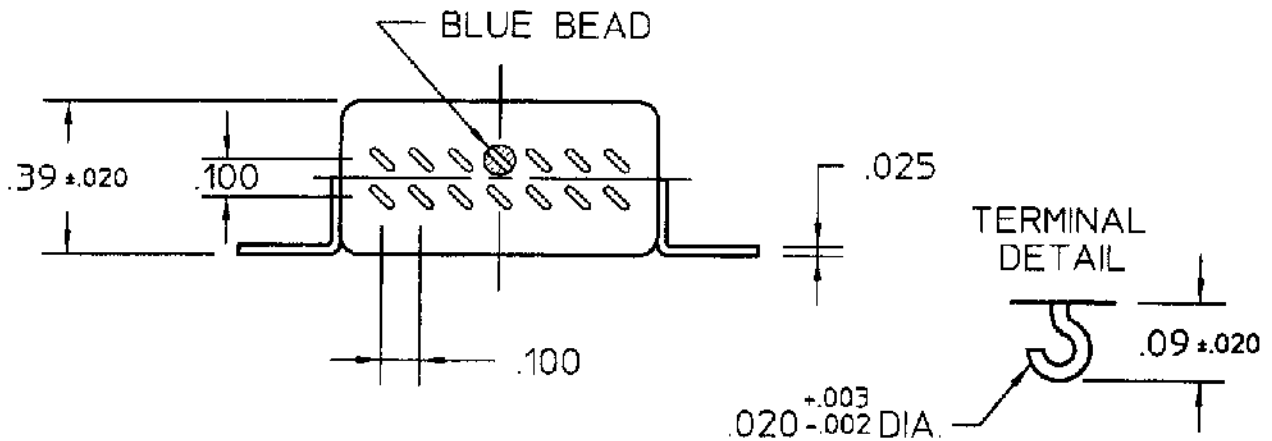

REV. 1  
DCO 63333


COIL: @ 25°C	
RESISTANCE	25 OHMS ±10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.2 VDC
MUST RELEASE	2.1 VDC MAX, 0.46 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	15	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 7 MS MAX.  
(INCLUDING BOUNCE)

CUSTOMER DATA SHEET

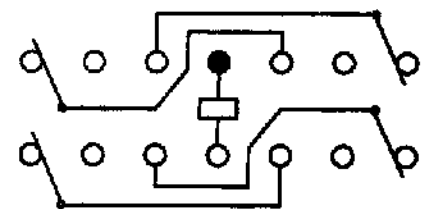

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
2 AMP 28 VDC RESISTIVE  
100,000 OPERATIONS

DR. R.B. 4/20/98 CK. TLG 10-24-00

**CII Technologies**  
advanced control electronic solutions

CUST. QPL  
CUST. NO. M39016/40-006 REV.

"SR" RELAY

SR-7606