



RECOMMENDED PANEL CUTOUT



CIRCUIT: SPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	DN	DN
2-1	DPEN	2-3

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERM NOS. FOR REF. ONLY
 4. RATING: 5A @120VAC or 28VDC; 2A @250VAC
 5. CONTACT MATERIAL: Copper Alloy w/Silver plate
 6. ELECTRICAL LIFE: 30,000 ACTUATIONS @Full Load
 7. INSULATION RESISTANCE: 1000 Mega Ohms min.
 8. DIELECTRIC STRENGTH: 1000V RMS @SEA LEVEL.
 9. OPERATING TEMPERATURE: -30°C TO 85°C
 10. 2002/95/EC (ROHS) COMPLIANT

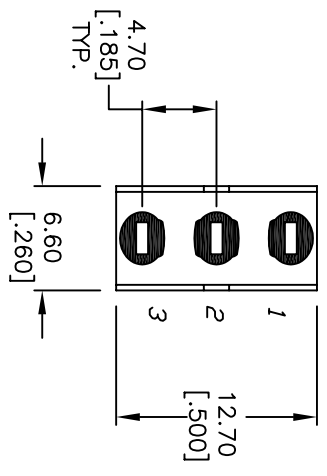

C	15970	UPDATE SWITCH TRAVEL DIM.	4/18/06	CT	TITLE 500 SSP-3 S1 M1 Q E B	SCALE 2:1	DATE 4/29/02	DR CJB	DWG T511204	REV C
B	15901	EDIT PANEL DIM, ADD RSHS	3/27/06	PH						
A	12100	RELEASED FOR PRODUCTION	4/29/02	CJB						
REV.	ECN No.	DESCRIPTION	DATE	CHKD						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMERRED										

E-SWITCH®