

FO-50360-L

4


3

2

1

HONEYWELL PART NUMBER
V15H16-CZ100A03-K
PRODUCT CODE CWF2020

REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

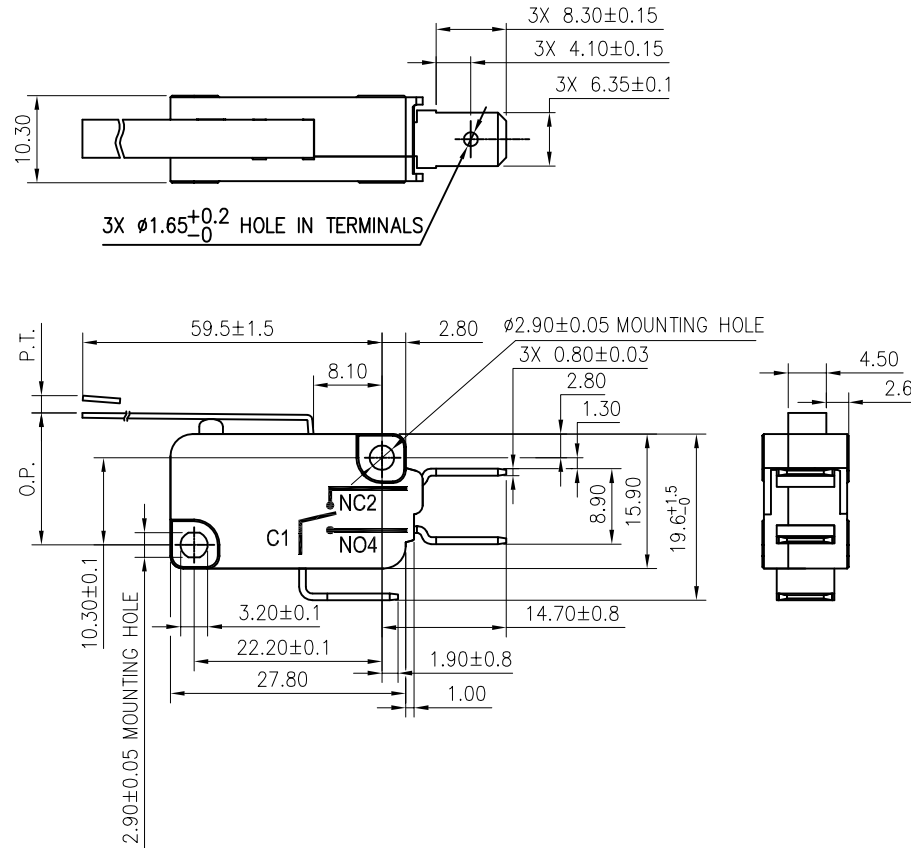

NOTES:

- TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

<p>CHARACTERISTICS</p> <p>OPERATING FORCE: 30gf MAX. DIFFERENTIAL FORCE: _____ RELEASE FORCE: 5gf MIN. FREE POSITION: _____ OPERATING POSITION: 15.3±3MM. PRE-TRAVEL: 6.4MM MAX. DIFFERENTIAL TRAVEL: 2.4MM MAX. OVER-TRAVEL: 2.6MM MIN. FULL OVERTRAVEL FORCE: _____</p>		<p>ELECTRICAL DATA</p> <p>CONTACT ARRANGEMENT S.P.D.T</p> <p> 16(4)A 250V~ 25T150 µ 5E4</p> <p> 16A 1/2HP 125/250VAC</p>		<p>DESIGN UNITS: MM</p> <p>TOLERANCES UNLESS NOTED:</p> <p>NO PLACE X ± - ONE PLACE .X ± - TWO PLACE .XX ± 0.40 THREE PLACE .XXX ± - ANGLES X ± 2°</p> <p>THIRD ANGLE PROJECTION</p> <p></p>		<p>DRAWN KSR 03DEC07</p> <p>CHECK RJ 03DEC07</p> <p>THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.</p> <p>INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY</p> <p>AutoCAD</p>		<p>Honeywell</p> <p>TITLE SWITCH - BASIC</p> <p>SIZE B TYPE I CAGE CODE DRAWING NAME V15H16-CZ100A03-K REV B</p> <p>SCALE — SHEET 1 OF 1</p>				
---	--	--	--	--	--	---	--	---	--	--	--	--

4

3

2

1