

SERIES TL 3320 SWITCHES

TACT SWITCHES SMT - RIGHT ANGLE



FEATURES & BENEFITS

- ▶ Multiple gram force options
- ▶ Right Angle SMT tact
- ▶ Unique design allows PC board edge mounting

APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals


SPECIFICATIONS

Contact Rating:	50mA @ 12 VDC
Life Expectancy:	80,000 cycles (50,000 for 250gf)
Contact Resistance:	100mΩ @ 5 VDC
Insulation Resistance:	100MΩ min.
Dielectric Strength:	250 VAC
Operating Temperature:	-20°C to 70°C
Travel:	.25mm ±0.15

MATERIALS

Actuator:	Nylon
Base:	Nylon
Cover:	Tin Plate
Terminals:	Copper alloy, plated





HOW TO ORDER

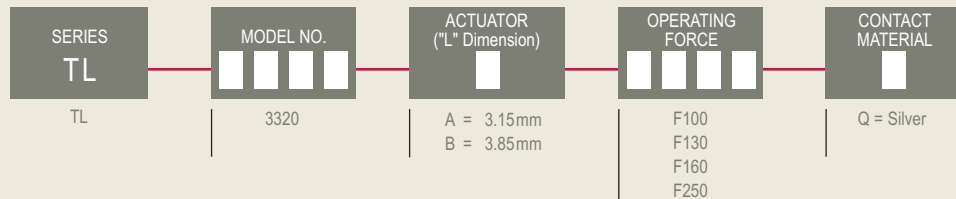


Example Ordering Number
TL-3320-B-F160-Q

Specifications subject to change without notice.

TL 3320

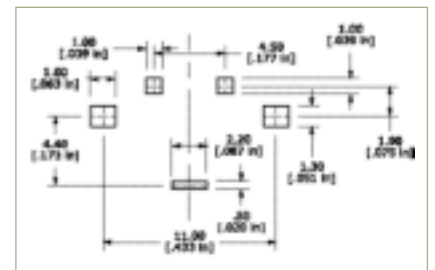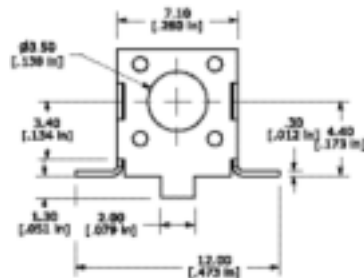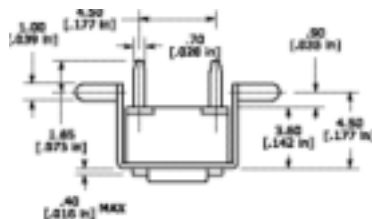

PC MOUNTING



SCHEMATIC