

## Warranty Statement

### 3 Year Limited Warranty

This TPI product is warranted to the purchaser against defect in materials and workmanship for 3 years from the date of purchase.

**Covered by TPI:** Repair parts and labour; or replacement of the product at the option of TPI. Normal transportation charges to the purchaser are also covered.

**Not covered by TPI:** Damage to the product which are the result of abuse, improper use or maintenance are not covered. Any other expense, consequential damages, incidental expenses including damages to property is not covered. Transportation expense to the company are not covered.


**To obtain warranty performance:** include with the product your name, address, phone number, written description of the problem and proof of purchase date. Carefully package and return to the address printed below.

Test Products International, Ltd.  
342 Bronte St. South Unit #9  
Milton, Ontario L9T 5B7  
Canada  
905-693-8558 Fax: 905 -693-0888  
e-mail: [info@tpicanada.com](mailto:info@tpicanada.com)

Test Products International, Inc.  
Headquarters:  
9615 SW Allen Blvd.  
Beaverton, OR 97005  
USA  
503-520-9197 T Fax: 503-520-1225  
e-mail: [info@tpi-thevalueleader.com](mailto:info@tpi-thevalueleader.com)

## Tuffman Pressure Meter

TPI 635/645/655

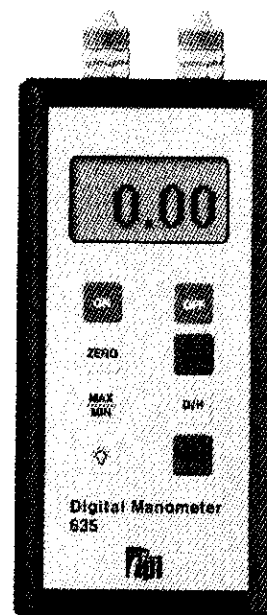

Visit TPI, The Value Leader™ at:  
[www.tpi-thevalueleader.com](http://www.tpi-thevalueleader.com)

Table of Contents

Page 3 Introduction & Product Description

Page 4 Safety Considerations

Page 5 Technical Data & International Symbols

Page 6 Features & Benefits

Page 7 Pressure Conversion Table

Page 8 Step by Step Procedures

Page 9 Accessories & Specifications

Page 10 Maintenance

Page 11 Trouble Shooting Guide  
EC declaration of conformity

Page 12 Warranty Statement



Introduction

***Congratulations!***

Thank you for purchasing TPI brand products. This meter is easy to use and is built to last. It is backed by a 3 year limited warranty. Please remember to return your product warranty registration card.

**Product Description**

The TPI 600 Tuffman series is a hand held range of pressure meters and can be summarized as follows.

TPI 635 5 PSI pressure range

TPI 645 30 PSI pressure range

TPI 655 100 PSI pressure range

All of these models are dual input differential pressure meters with 7 selectable scales to choose from: mbar, kPa, PSI, inHg, mmHg,inH2O, and mH2O.



**Safety Considerations**

**WARNING:** Please follow the manufacture's test procedure whenever possible. Make sure the pressure to be measured is not outside the range of the TPI 635/645/655 meter.

**General Guidelines**

**ALWAYS**

- Test the pressure meter before use to ensure it is operating properly
- Ensure that the connecting hose you are using is free from kinks or splits
- Double check all connections before testing

**NEVER**

- Connect the instrument to an unknown pressure source if the source is twice the working pressure of the instrument the sensor will be damaged and may cause injury to the user
- Tamper with the instrument or attempt to modify it in any way. Otherwise accident and injury may occur and the warranty becomes void.



**Technical Data**

Controls TPI 635/645/655

ON	Switches instrument "ON" for use
OFF	Switches instrument "OFF" after use
ZERO	Automatically "zero's" the instrument
==	Smoothing function to stabilize rapidly changing readings
MAX MIN	Enables user to recall & display both the maximum and minimum pressure recorded since the function was selected. Press button once to activate, twice to read minimum and three times to read the maximum. To cancel the function press and the hold the "MAX/MIN" button
HOLD	Maintains the reading on the LCD display
UNITS	Selects 7 units of measure kPa, PSI, inHg, mmHg, inH2O, mH2O, mbar



## Features & Benefits

- Autoranging - Provides high resolution & accuracy at low pressures where it is needed
- Auto Power Off - Powers off after 30 minutes to conserve battery life.
- Trim Mode - Smoothing function to stabilize erratic readings. It displays the average value of 4 values previously measured.
- Zero function - Provides immediate push-button zeroing for Speed and accuracy.
- Record Max/Min - Enables long term testing of pressure systems for leaks
- Hold - Enables the user to freeze the display reading, when working in cramped working conditions, when the display is not visible.
- Units - Change the display value in any one of the following engineering units. kPa, PSI, inHg, mmHg, inH2O, mH2O and mbar.

## Pressure Conversion Table

	Atmos	mbar	inHg	inH2O	PSI	mmHg	mH2O	kPa
Atmos	1	9.86923 $\times 10^{-4}$	3.34207 $\times 10^{-2}$	2.45832 $\times 10^{-3}$	6.8046 $\times 10^{-2}$	1.31579 $\times 10^{-3}$	9.67841 $\times 10^{-2}$	9.86923 $\times 10^{-3}$
mbar	1013.25	1	33.8638	2.49089	68.9476	1.33322	98.0665	10
inHg	29.9213	2.95301 $\times 10^{-2}$	1	7.35561 $\times 10^{-2}$	2.036	3.937 $\times 10^{-2}$	2.89591	0.295301
inH2O	406.8	0.401463	13.5951	1	27.68	0.534	39.3701	4.01463
PSI	14.6959	1.45038 $\times 10^{-2}$	0.491153	3.61273 $\times 10^{-2}$	1	1.934 $\times 10^{-2}$	1.42233	0.145038
mmHg	760	0.750064	25.4	1.86833	51.715	1	73.5561	7.50064
mH2O	10.3323	1.01972 $\times 10^{-2}$	0.345315	2.54 $\times 10^{-2}$	0.70307	1.35951 $\times 10^{-2}$	1	0.101972
kPa	101.325	0.1	3.38638	0.249089	6.89476	0.133322	9.80665	1



## Step by Step Procedures

- Press the “ON” key and the LCD display will be activated if it does not read 0.00 proceed as follows
- Press the “zero” key and the display should read zero , if not repeat until it does
- Connect pressure meter to installation or equipment to be tested using appropriate hose connection in accordance with the manufactures instructions
- The pressure reading will appear on the display. To activate the back-light in poor light conditions press the “ON” key at any time
- If the reading is erratic or changing activate the smoothing unction by pressing the “=” key
- To freeze a reading in awkward or cramped working spaces press the “Hold” key
- To record maximum & minimum pressures when establishing pressure decay or carrying out gas line soundness testing press the “MAX/MIN” key
- To convert the displayed pressure reading to another engineering unit depress the “Unit” key anytime and scroll through to the desired units of pressure.



## Accessories & Specifications

### Standard Accessories

9V ALKALINE battery  
Replacement tubing 1/4" OD x 28"(L)

### Part No.

A009A  
A601

### Optional Accessories

Replacement tubing 1/4" OD x 28" T Fitting  
Large Zippered Case  
9V Lithium battery

### Part No.

A605  
A904  
U9VL

Features	Model	635	645	655
Range		5 PSI	30 PSI	100 PSI
Accuracy		±0.2% of full scale +3 digits		
Over Pressure		14.5 psi (1000 mbar)	58.0 psi (4000 mbar)	145 psi (10 bar)
Power Supply		9V		
Relative Humidity		0% to 80% (0° to + 40°C )		
Operating Temp.		32° to 104°F (0° to +40°C)		
Storage Temp.		14° to 122°F (-10° to + 50°C)		
Auto Power Off		After 30 minutes		
Trim Mode		Yes		
Zero Adjust		Yes Push Button		
Data Hold		Yes		
Record		Yes Max/Min		



## Maintenance

### Battery Replacement

The 635/645/655 will display a iBATi symbol when the internal 9V battery needs replacement. Replace battery as follows:

1. Ensure instrument is switched off
2. Loosen the cross head screw on the battery compartment cover
3. Remove battery compartment cover
4. Remove old battery
5. Replace with new battery 9V NEDA 1604 or equivalent
6. Reassemble the instrument in reverse order from above
7. RE-fit the cross head screw being sure not to over tighten

### Cleaning

Use a mild detergent and a slightly damp cloth to clean the surfaces of the instrument.



## Trouble Shooting Guide

<u>Problem</u>	<u>Probable Cause</u>
Unit does not zero	Zero button has not been operated
Unit still does not zero	If reading is greater than 0.05 and constantly fluctuation return to local service centre
iBATi appears on the display	Replace battery immediately 9V NEDA 1505 or equivalent

### EC Declaration of Conformity

This is to certify that model 634/645/655 conform to the protection requirements of the council directive 89/336/EEC, in the approximation of laws of the member states relating to Electromagnetic compatibility by application of the following standards

EN50081-1 1992 Emissions Standard  
EN50082-1 1992 Immunity Standard

To ensure conformity with these standards, this instrument must be operated in accordance with the instructions and specifications given in this manual.

