
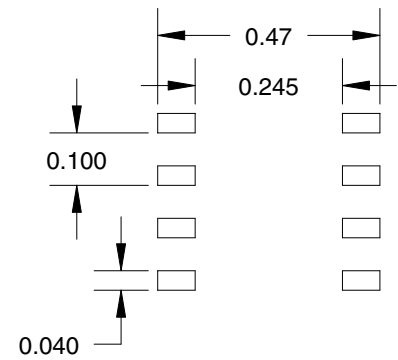


Ref: PWB LAYOUT



**SPECIFICATIONS:**

1. INDUCTANCE: @ 10 kHz, 0.1 Vrms,  
1 - 4 = 225 uHy MIN
2. DCR: mOHMS  
1 - 4 = 0.1 Nom  
5 - 8 = 0.1 Nom
3. LEAKAGE INDUCTANCE: 1 - 4, 0.1V @ 100kHz  
SHORT 5 - 8 < 0.4 uHy
4. INTERWINDING CAPACITANCE:  
1 - 4 to 5 - 8 @ 100 KHz, 1.0V < 15 pf
5. TURNS AND PHASE:  
1 - 4 : 5 - 8 = 1 : 1 +/- 2%
- 6 DIELECTRIC STRENGTH:  
1500 VAC 1 sec

A						
REV.	DATE	ECN	BY	DESCRIPTION		
TOLERANCES ON				<b>Newava Tech.</b> Watertown, SD 57201 605-886-0264		
.XXX	.XX	ANGLE				Transformer, SMD Digital Audio, 1:1
+ .	+ .	+ .				
DRAWN:			DATE	SCALE	MODEL	
CHECKED: -			-	DRAWING NO.		
APPROVED: -			-	NEXT ASSY:		
THIS PRINT MUST NOT BE COPIED IN WHOLE OR IN PART				OR USED DETRIMENTALLY TO OUR INTEREST		
					SHEET 1 OF 1 <b>S37211</b> <b>A</b>	